


 DENOTES  
MEGALUGS



NOTES:

1. MEGALUGS MANUFACTURED BY EBAA IRON, INC., SIGMA, SIP OR APPROVED EQUAL, SHALL BE USED AT ALL MECHANICAL JOINTS.
2. PLACE CONCRETE BLOCK UNDER ALL GATE VALVES AND HYDRANTS.
3. THRUST BLOCKING REQUIRED BEHIND ALL TEES, BENDS AND HYDRANTS.
4. ALL BOLTS, T-BOLTS, NUTS AND RODDING INSTALLED BELOW GRADE SHALL BE ASTM F593 TYPE 304 STAINLESS STEEL.
5. ROMAC INDUSTRIES ALPHA WIDE RANGE RESTRAINTS MAY BE USED IN PLACE OF TRADITIONAL RESTRAINED COUPLINGS, END CAPS AND FLANGED COUPLINGS.

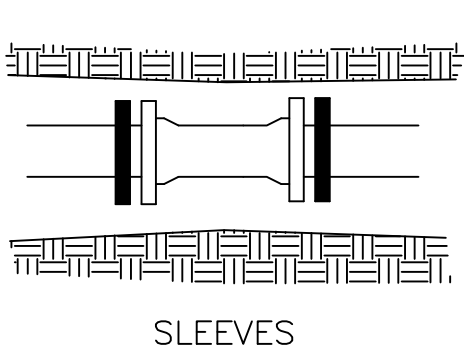

STANDARD DETAILS  
TYPICAL MEGALUG LOCATION  
CITY OF PLYMOUTH

PUBLISHED  
1-24

CITY PL. NO.  
W-3  
REVISED 3-23